

borg&
overström

Distinctive
by design.



borg&
overström

Advanced performance. Minimalist design.

The T1 is the ideal solution for busy workplaces where space may be at a premium. With advanced dispensing features packaged in a minimal and contemporary design, the T1 will complement even the smallest communal area or kitchenette.



Distinctive
by design.

High-capacity dispensing

The T1 eliminates the need for single-use plastic bottles with high-capacity dispensing. It delivers 50 litres per hour of chilled, ambient, and sparkling drinking water, making refilling reusable vessels such as drinking bottles fast and convenient.

Cutting-edge UV protection

As an option, the T1 can be pre-fitted with Viovand[®], a mercury-free, chemical-free and energy-efficient LED-UV water purification system. For complete peace of mind, it also includes additional hygiene features via Borg & Overström's Totality[®] methodology.

Next-generation ProCore™

Under the counter is a compact powerhouse. ProCore™ is a low-maintenance next-generation water dispensing system. In addition to being energy-efficient, it's fitted with the new eco R290 refrigerant gas.

Plug and play installation

There are no fiddly wires to connect with the T1. The plug and play USB 3 connector makes this tap super easy to install.

Countertop convenience

This integrated tap system can be positioned over a sink or combined with a stylish circular drip tray which complements the design of the tap. The drip tray can either be plumbed into mains waste or used with the Borg & Overström alarmed waste kit.

Minimal yet durable design

Beneath the minimalist, contemporary exterior lies an innovative water dispensing system built for durability and efficiency. The tap is PVD coated for a high-end yet durable finish, while the undercounter cabinet is colour-coated GreenCoat[®] steel.

Low energy consumption

The T1 is consistently energy efficient, making it both economical and eco-friendly. This dynamic integrated tap system is lean and economical, with absolutely no sacrifice to output and quality.

Ventilation kit included

A ventilation kit is included with this system. It's easy to install and increases the efficiency of the ProCore™ by allowing a continuous cycle of cool air.



Distinctive
by design.

borg & overström

Water system



Dry Chill *

Configurations



Integrated Tap

Water options



Chilled



Ambient



Sparkling

Tap finishes



Steel





Black



Distinctive
by design.

t1

Specifications	T1 ProCore	Dispense options	Max power consumption	Steel	Black	Steel ECO-UV	Black ECO-UV
Tap dimensions W42xD163xH385mm	Power requirements Hertz 50/Volts 230-240	Chilled & Ambient	140W	741010	741000	741030	741020
Dispense height 310mm	Water system Dry Chill*	Chilled & Sparkling	200W	741050	741040	741070	741060
ProCore™ dimensions W320xD375xH335mm	Chilled temperature Min 2°C/Max 11°C	Chilled, Sparkling & Ambient	200W	741090	741080	741110	741100
Simple-fit Ventilation Base W322xD431xH60mm (Includes 20mm overhang)	Throughput flow rate 50 litres per hour (LPH) 60 500ml bottles per hour (BPH)						

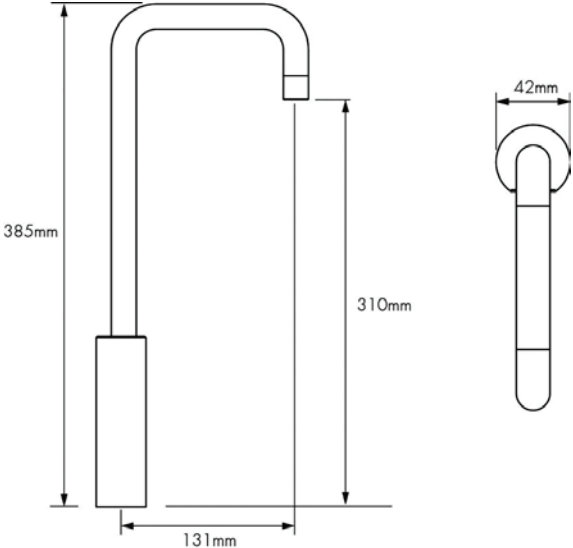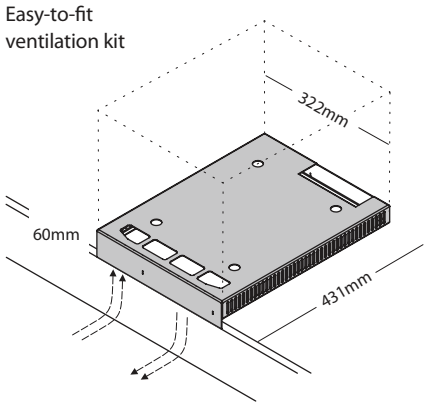

Distinctive
by design.